




FRIESEN POWER

ELECTRIC MOTORS
AND CONTROLS

One-Third Horsepower Solution

EKEQO-CV

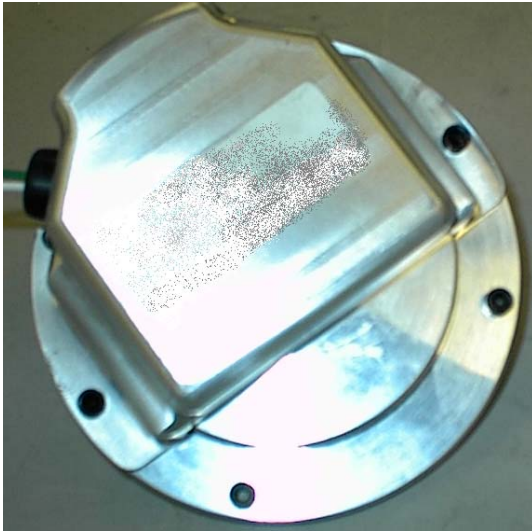

FEATURE/BENEFITS

Friesen Power motors have the following significant features over the competition.

- Better than premium efficiency operation
- Quieter
- Smaller (superior power density)
- Lighter
- No Cogging
- Reduced EM/RF Interference
- Superior low-end torque
- Cleaner power impacts
- Integrated Controller
- Brushless

DESCRIPTION

Friesen Power motors are the most advanced axial flux motors on the market today. They are designed for superior torque, efficient operation and long life.

Packaged solution includes motor and control. All specifications and dimensions incorporate the complete motor solution.

MODEL	EKEQO-CV	
FRAME	48C	
Continuous Ratings	English	Metric
Voltage	440 VAC	
Speed	3450 rpm	
Torque	6 lb-in	675 mNm
Current	.66 Amps	
Power Consumption	290 Watts	
Power Output	1/3 hp	250 Watts
System Efficiency	86%	

Dimensions		
Package Weight	7.4 lbs	3.36 kg
Diameter	6 in	15.24 cm
Length	6 in	15.24 cm
Rabbit diameter	3 in	7.62 cm
Bolt Circle Diameter	4 in	10.16 cm
Bolt Thread Size	3/8 x 16	n/a
Thread Depth	.56 in	1.4 cm
Shaft Diameter	.625 in	1.6 cm
Shaft Length	1.88 in	4.775 cm
Shaft Threads	.5 in x 20	n/a
Keyway	.187 in	.475 cm